STATE OF NORTH DAKOTA

BOARD OF WATER WELL CONTRACTORS

900 E. BOULEVARD • BISMARCK, NORTH DAKOTA 58501

WELL DRILLER'S REPORT

State law requires that this report be filed with the State Board of Water Well Contractors within 30 days after completion or abandonment of the well.

1. WELL OWNER

Name Willard Bahm

Address Flasher, North Dakota

2. WELL LOCATION

Sketch map location must agree with written location.

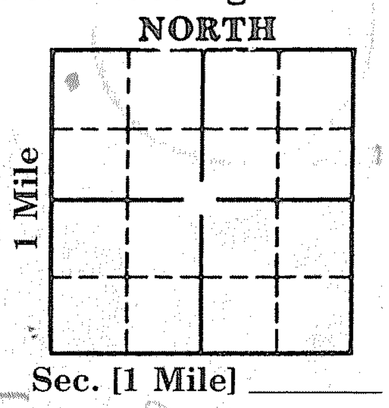

County Morton

¼ ¼ ¼ Sec. 4 Twp. 135 N. Rg. 84 W.

3. PROPOSED USE

☐ Domestic ☒ Stock ☐ Geothermal ☐ Irrigation ☐ Municipal ☐ Monitoring ☐ Industrial ☐ Test Hole

4. METHOD DRILLED

☐ Cable ☐ Reverse Rotary ☐ Bored ☒ Forward Rotary ☐ Jetted ☐ Auger

If other, specify

5. WATER QUALITY

Was a water sample collected for chemical analysis?

☐ Yes ☒ No

If so, to what laboratory was it sent

6. WELL CONSTRUCTION

Diameter of hole 6 3/4 inches. Depth 320 feet.

Casing: ☐ Steel ☒ Plastic ☐ Concrete ☐ Threaded ☐ Welded ☐ Other

If other, specify

Pipe Weight:	Diameter:	From:	To:
200 lb/ft.	4 inches	0 feet	320 feet
lb/ft.	inches	feet	feet
lb/ft.	inches	feet	feet

Was perforated pipe used? ☒ Yes ☐ No

Perforated pipe set from 280 ft to 320 feet

Was casing left open end? ☒ Yes ☐ No

Was a well screened installed? ☐ Yes ☒ No

Material Diameter inches
(stainless steel, bronze, etc.)

Slot size set from feet to feet

Slot size set from feet to feet

Was a packer or seal used? ☒ Yes ☐ No

If so, what material Rubber Depth 40 Ft.

Type of well: Straight screen ☒ Gravel packed ☐

Depth grouted: From 38 To 40

Grouting Material: Cement Other Formation Packer

If other explain: With Bentonite.

Well head completion: Pitless unit

12" above grade X Other

If other, specify

Was pump installed: ☐ Yes ☒ No

Was well disinfected upon completion? ☐ Yes ☒ No

7. WATER LEVEL

Static water level 76 feet below land surface

If flowing: closed-in pressure psi

GPM flow through inch pipe

Controlled by: ☐ Valve ☐ Reducers ☐ Other

If other, specify

8. WELL TEST DATA

☐ Pump ☒ Bailer ☐ Other

Pumping level below land surface:

76 ft. after 1 hrs. pumping 9 gpm

92 ft. after 2 1/2 hrs. pumping 9 gpm

ft. after hrs. pumping gpm

9. WELL LOG

Formation	Depth (ft.) From	To
Topsoil	0	1
Brown Sand	1	12
Brown Clay	12	80
Green clay	80	82
Gray Clay	82	160
Brown Clay	160	280
Green Clay	280	308
Water Sand	308	319
Brown Clay	319	320

(Use separate sheet if necessary.)

10. DATE COMPLETED 10-4-88

11. WAS WELL PLUGGED OR ABANDONED?

☐ Yes ☒ No

If so, how

12. REMARKS:

13. DRILLER'S CERTIFICATION

This well was drilled under my jurisdiction and this report is true to the best of my knowledge.

Driller Well Drilling 84

Driller's or Firm's Name Certificate No.

R.R. 2 Box 68D Raleigh, N.D.

Address

Peter E Braun - 10-4-88

Signed by X Date

WHITE—DRILLER'S COPY YELLOW—BOARD'S COPY PINK—CUSTOMER'S COPY